




iPad mini 4 LTE Battery Connector Replacement

Prerequisite for disconnecting the battery in an iPad Mini 4.

Written By: Evan Noronha

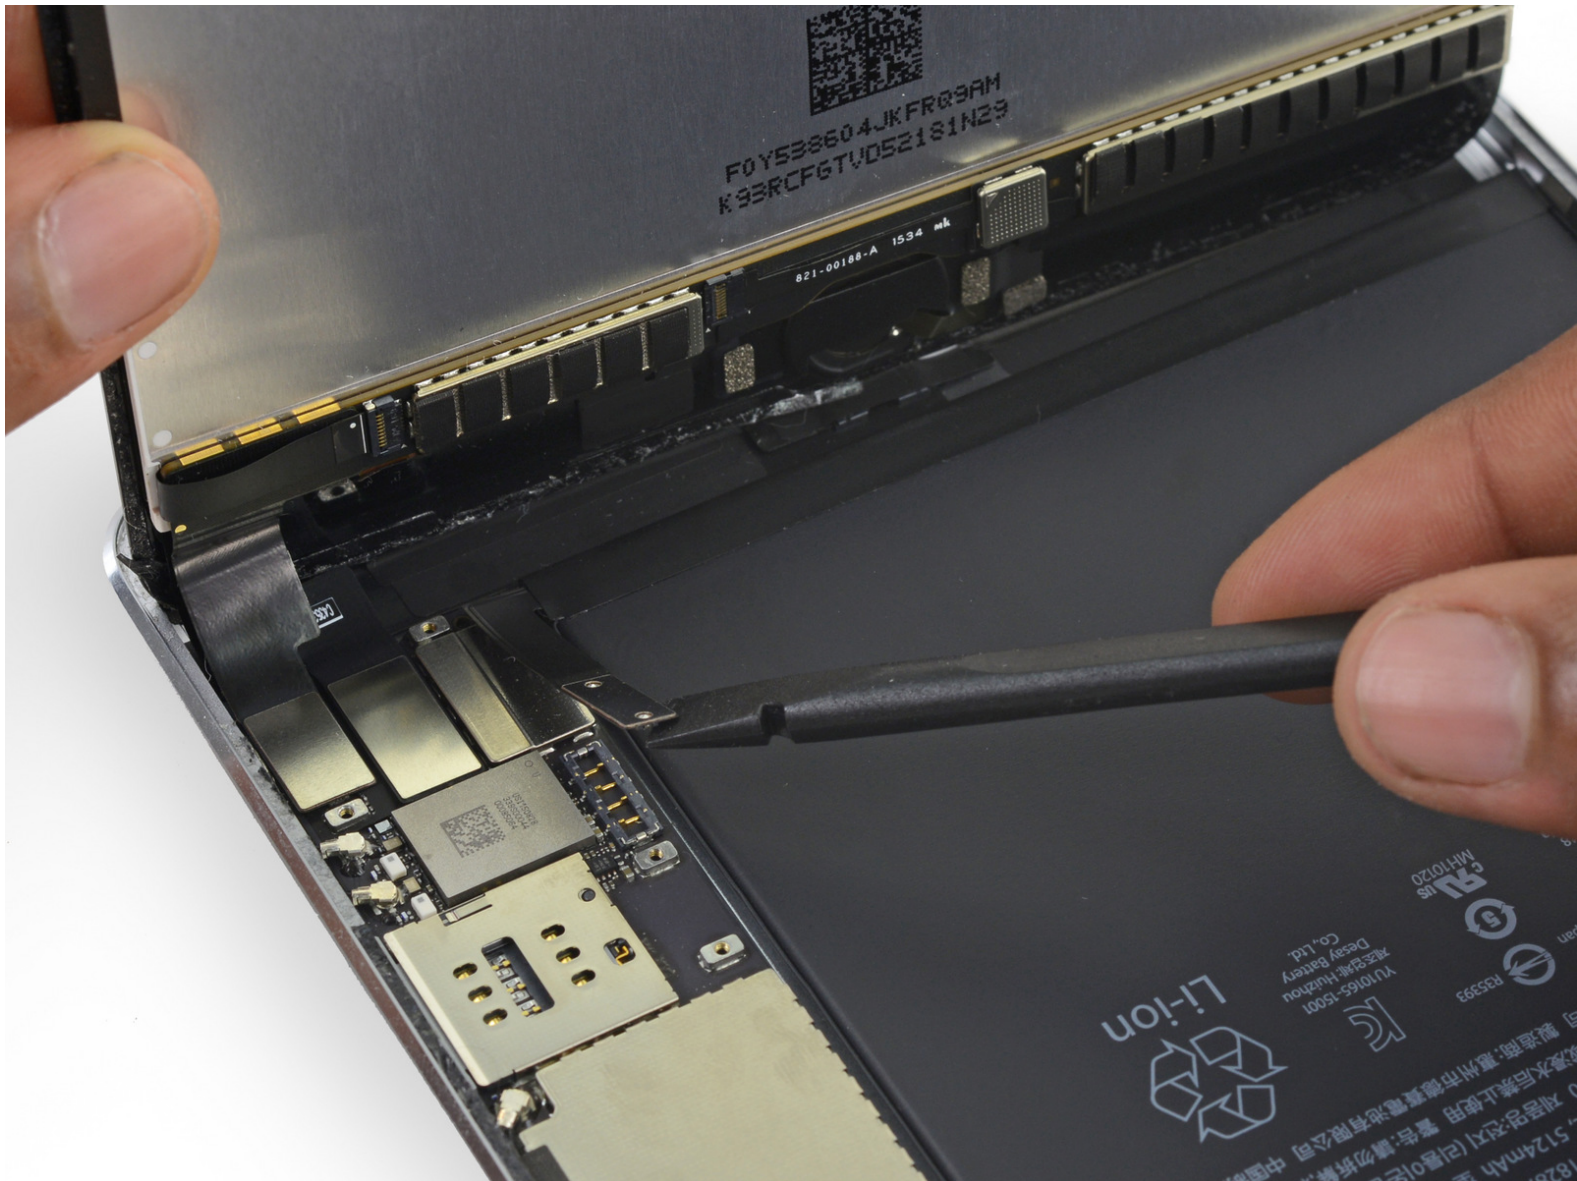

INTRODUCTION

Prerequisite guide for disconnecting the battery before performing any repair.

TOOLS:

- [Spudger](#) (1)
-


Step 1 — Battery Connector



i To avoid stressing any cables, hold the display assembly perpendicular to the body of the iPad until it is disconnected.

- Remove the four 1.2 mm Phillips screws over the battery/display connector bracket.

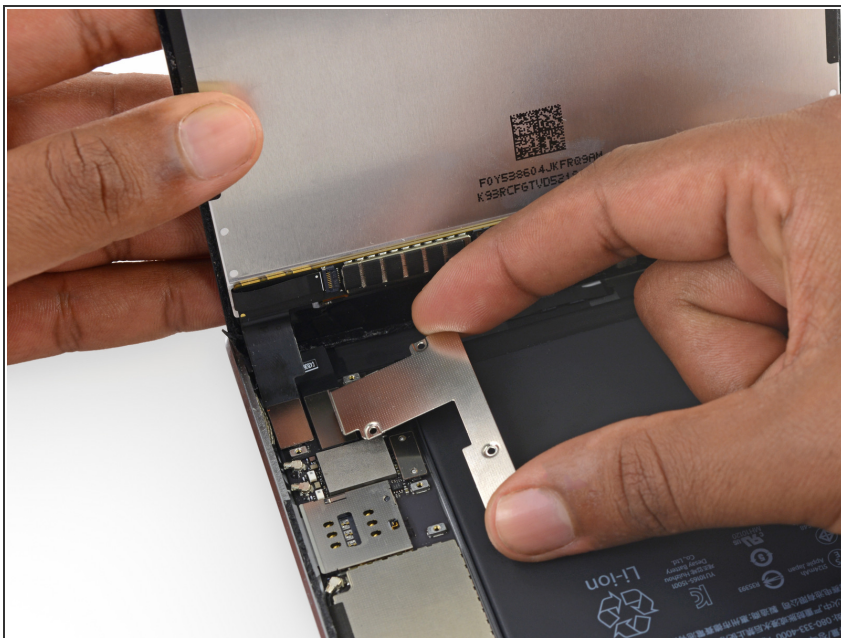

Step 2



- Remove the battery/display cable bracket.

Step 3



-  When disconnecting any press connectors from the logic board, be sure to lift the connector straight up to avoid ripping the socket off the board.
- Use the flat tip of a spudger to disconnect the battery connector from its socket on the logic board.
 -  Bend the battery connector ribbon cable up slightly to prevent it from making contact and powering on the iPad.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-31 12:12:03 AM.